



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04M	A2	(11) International Publication Number: WO 98/39893 (43) International Publication Date: 11 September 1998 (11.09.98)
<p>(21) International Application Number: PCT/US98/03893</p> <p>(22) International Filing Date: 2 March 1998 (02.03.98)</p> <p>(30) Priority Data: 08/810,566 3 March 1997 (03.03.97) US</p> <p>(71) Applicant: STARSIGHT TELECAST, INC. [US/US]; 3rd floor, 39650 Liberty Street, Fremont, CA 94538 (US).</p> <p>(72) Inventor: KLOSTERMAN, Brian, L.; 310 Rio Grande Place, San Ramon, CA 94538 (US).</p> <p>(74) Agents: JOHNSTON, R., W. et al.; Christie, Parker & Hale, LLP, P.O. Box 7068, Pasadena, CA 91109-7068 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>Without international search report and to be republished upon receipt of that report.</i></p>
<p>(54) Title: ELECTRONIC PROGRAMMING GUIDE WITH MOVIE PREVIEW</p> <p>(57) Abstract</p> <p>A preview system activated from an on-screen programming guide displays a video preview of a selected particular program on the display screen. The video preview is displayed on less than the full screen so that the video can be highly-compressed to save bandwidth.</p>		

Best Available Copy

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

ELECTRONIC PROGRAMMING GUIDE WITH MOVIE PREVIEW

5

BACKGROUND OF THE INVENTION

The present invention generally relates to television schedule information, and more particularly to a system and method for providing previews of scheduled programming to assist a viewer in making scheduling decisions.

As the number of television stations in a metropolitan area or on a cable network has increased, the number of programs of potential interest that are presented to a viewer has risen dramatically. With the use of dish antennas capable of receiving direct satellite signals, the multitude of programs available to the viewer has further increased.

Additionally, television faces a digital future that will see the merger of television and PC technology. The television set of the future will include a micro-computer, a modem of interconnectivity with other computers over networks, intranets, and the internet, and be connectable to computer peripherals such as printers. Such capabilities as near "video on demand" (NVOD), "video on demand", access to the world wide web", "audio on demand", etc. will present the viewer with a plethora of information and bandwidth.

As has become increasingly evident, information overload can actually reduce the usefulness of the information delivered. Accordingly, a great challenge exists to provide an interface that manages and provides an intelligent, user-friendly interface to the information available.

Consequently, television schedule systems that are provided directly on the viewer's television screen have been developed to assist the viewer in sorting through these various programs and determining which programs to watch or record. One such television schedule system is disclosed in commonly assigned U.S. Patent No. 5,353,121 (Young et al.), the complete disclosure of which is hereby incorporated by

reference. In one embodiment of Young, the television schedule includes a series of menu screens having an array of cells corresponding to different television programs. The viewer may scroll through the cells to view which television programs are being presented on various channels at various times. In addition, the viewer may select certain cells to obtain more information on the associated program or to pull up other submenus with additional options.

The recent development of television schedule systems, such as the above described patent to Young, have created many new challenges. One such challenge is assisting viewers to select programs to view from the vast amount of programming available. As more programming is available the consumer needs more information to assist in selecting, especially in the case of pay-per-view where the consumer must intelligently budget entertainment costs.

SUMMARY OF THE INVENTION

The present invention is a method and system for providing video previews for particular programs selected from an electronic programming guide.

According to one aspect of the invention, a bit stream modulated on a carrier includes preview video packets. When a viewer selects a particular program from an on-screen guide a video stream, including the video packets or signals for the particular program, is selected and utilized to generate a "preview" video signal. The preview video is then displayed on the screen.

According to another aspect of the invention, the preview video is displayed on only a portion of the screen to allow the video to be transmitted using less bandwidth.

According to another aspect of the invention, a single video preview is transmitted in a digital data stream as a carousel or endless loop. There are individual bit streams for each preview.

According to another aspect of the invention, several video previews are transmitted in a single bit stream.

The different previews are transmitted as a carousel or endless loop.

Other features and advantages of the invention will be apparent in view of the following detailed description and
5 appended drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic diagram of an EPG and preview window displayed on the screen of a TV system;

10 Fig. 2 is a schematic diagram of a TV system;

Fig. 3 is a block diagram of a hardware unit for generating an on-screen electronic programming guide (EPG);

Fig. 4 is a schematic diagram of the hierarchical database utilized to generate the EPG;

15 Figs. 5A-5D are schematic diagrams of data structures in the database;

Fig. 6 is a schematic diagram depicting the transmission of an EPG in a digital satellite system;

20 Fig. 7 is a block diagram of the system for displaying preview videos;

Fig. 8 is a flow chart of the steps for displaying a preview video;

Fig. 9 is a schematic diagram of digital information carried by a carrier; and

25 Fig. 10 is a schematic diagram of different carousel or endless loop configurations for transmitting preview packets.

DESCRIPTION OF THE PREFERRED EMBODIMENT

30

Overview of the Previewing System

Fig. 1 depicts a preferred embodiment of the invention. An electronic program guide depicts movies and/or other programs available from a DBS service. These movies or
35 programs may be available on demand or nearly-on-demand, i.e. with a short wait or can be scanned for future viewing..

The viewer typically accesses an on-screen electronic programming guide (EPG) 10 which displays

programming in a grid or matrix with channels listed vertically, times listed horizontally, and guide entries placed in the grid entries indexed by a particular channel and time.

5 In the preferred embodiment, the user can activate a guide entry for a particular movie and view a preview, known as a trailer, of the movie in a preview window 12 displayed on the screen. The entry may be activated by first moving the pointer/cursor over the entry in the guide and then clicking
10 to activate the preview or activation can be self-actuated whenever the pointer/cursor is moved over an entry. In a preferred embodiment the preview window 12 is sized so that the video can be smaller to reduce bandwidth requirements.

 In a DBS (digital broadcasting system) video
15 baseband signals are digitized, compressed, transmitted. Because of advances in the art of compression, the frequency spectrum once used to transmit a single program can now transmit four programs. Typically, in addition to video signals, other bitstreams encoding information such as audio,
20 VBI (vertical blanking information data such as closed caption and teletext), program guide information, and conditional access information, are provided as separate bitstreams, multiplexed into a composite bit stream, and transmitted.

 In a preferred embodiment, a trailer bit stream
25 comprising highly compressed movie trailer video and audio bit streams is formed and provided by a DBS. Each trailer includes header bits identifying the movie and providing other information about the trailer. The header and trailer form a trailer packet. The trailer bit stream is modulated onto the
30 carrier as a carousel or an endless loop so that each trailer is retransmitted cyclically and will be rebroadcast after a short delay.

 A decoder at the viewer's location receives
carriers and controls a tuner/demodulator to select one
35 carrier. The carrier is sampled, decoded, error-corrected, and demultiplexed to separate the various bit streams. The decoder includes video decoder chips that decompress

compressed video to reconstruct pictures of virtually any size.

When the viewer activates the guide to display a trailer, the decoder is controlled to tune to the carrier transmitting the trailer bit stream, select the trailer bit stream from the demultiplexed bit streams, process header bits of each trailer packet to identify the trailer video and audio for the movies selected, decompress the video trailer data, and transfer the decompressed video data as an auxiliary video signal to a picture-within-picture display controller which displays the trailer within the window that is 1/9 the size of the full screen.

Various techniques for activating the preview function may be utilized and are not part of the present invention. For example, an icon in the guide entry may be clicked or a pop-up menu may be utilized.

Overview of an EPG System

In a preferred embodiment, the electronic program guide of the invention may be implemented either on a personal computer, a PCTV, a set-top box, or a television including a custom board. However, the invention is not limited to any particular hardware configuration and will have increased utility as new combinations of computers and television systems are developed. In the following any of the above will sometimes be referred to as a "TV system". Block diagrams of representative TV systems are depicted in Fig. 2. Details of implementation are not depicted because the invention is not limited to any particular TV system.

As is well known, the picture to be displayed may be transmitted as an analog signal, for example according to the NTSC standard utilized in the United States, or as a digital signal modulated. The signals may be received over a cable, phone lines, the Internet, or via an antenna or satellite dish. Typically, television sets are designed to receive analog signals and computer display devices are designed to display pictures encoded in a digital format. However, the

decoder system converts the digital data to an analog signal for display on a television set.

5 In Fig. 2, analog or digital TV signals, received via cable 30, antenna 32, or satellite dish 34, are provided to a television system. If the signal is from a digital broadcast service, then a decoder 36 converts the signal to baseband video and audio or channel 3/4 RF. If the signal is an analog signal it is passed through as a live video output. The television system 38, depending on its configuration,
10 receives selected ones of the outputs and displays the received program.

A PCTV includes a TV card 40, connected to either live video, baseband video, or channel 3/4 output, digitizes the video image and displays the video image in a resizable
15 window on the computer monitor. The PCTV is also coupled to land telephone lines by a modem 42.

If the received signal is an analog TV signal the TV card of the PCTV digitizes the analog signal and extracts included information from the vertical blanking intervals. On
20 the other hand, if the signal is a digital signal separate audio, video, VBI (vertical blanking information such as closed caption, teletext, and program related information), program guide, and conditional access information are provided as separate bitstreams. The video and audio bitstreams for
25 programs are converted to a format for display and the program guide information is processed to form a program guide database. The processor, executing software stored in memory, or available in a "live" digital data stream, generates interactive electronic program guide images and images of
30 received programs. The guide can be used to interact with and control programs displayed in the window.

A television system configured to display an electronic program guide, such as a guide provided by StarSight Telecast includes an on-screen display controller and other
35 hardware described below. If a standard analog broadcast signal is received, program guide data is extracted from the VBI by a VBI data slicer and processed to form a program database. If a DBS digital signal is received, either from a

satellite or cable, VBI and program data are provided in separate bit streams. The program guide images are either generated locally or remotely and provided to an on-screen display controller. Interactivity is provided via a remote control.

Alternatively, the program guide can be displayed on a computer monitor that interactively controls the television set through, for example, an IR interface, including an IR blaster 44, to generate IR codes to control the television and/or a VCR.

If the electronic guide database is generated locally, the system for creating the electronic programming guide must receive television schedule information and process the received information to create a database. Thus, the system requires a data reception unit, a processor, memory to store program code and a database, an on-screen display generator (OSD), and a control interface for tuning to selected channels.

In one preferred embodiment, the schedule information is transmitted as a set of short commands of specified formats. Different commands communicate information such as a show schedule for a given channel, the title of each show in the schedule, descriptions and information attributes about each show in the channel. Thus, information for a show to be broadcast at a particular time is transmitted in several commands. ID numbers in the commands facilitate organizing the information into a relational database utilizing database engine (DBE) software stored in memory and executed by the processor.

In a preferred embodiment, a board is included at a viewer's television set and the database is stored locally and commands are transmitted in the VBIs of programming on a designated channel, for example PBS. An example of a board for receiving program guide information, generating program guide database, displaying the program guide, and interactively controlling the program guide is depicted in Fig. 3. The commands are transmitted to the board in the

vertical blanking intervals of programming broadcast on a designated channel.

Alternatively, the commands could be transmitted to the local unit over land telephone lines. Additionally, as
5 described below, in some systems the database is built remotely and the guide itself is transmitted to the local unit.

The database engine builds a hierarchical database in the RAM. The hierarchical structure of the database is
10 depicted in Fig. 4. The database is structured internally as schedule data structures and theme data structures linked by handles and handle tables. Each handle is an index to a handle table which contains pointers to blocks of memory where items of the database are stored.

15 In another embodiment, for example a DSS system, program guide data is transmitted as a bit stream that is processed by the database engine.

Additionally, a N.E.W.S. (new, entertainment, weather, and sports) database has been developed. Commands
20 including story, text and story IDs are transmitted. Links from the program guide to stories related to a program can be created and the related stories can be accessed from the guide.

An advertisement database is also created from
25 commands including advertising text and logos including IDs for linking the ads to shows displayed in the EPG. The user may access the advertising information directly from the guide.

An internet database is also created from commands
30 including URLs to internet sites related to programs displayed on the EPG. If the viewer is viewing the EPG on a platform that is Web enabled, e.g., WebTV, a PC, or PCTV, then a linked site can be accessed directly from the EPG.

Additionally, a graphics program module builds
35 various displays utilizing schedule, show title, and other information from the database. If the OSD controller operates in the character mode the display is a grid of character codes

which are transferred to the OSD controller which generates the on-screen display.

5 An input-response user interface program module responds to user input to generate new displays responsive to the particular input. In one preferred embodiment, the user utilizes an input device, e.g., a remote control, mouse, or keyboard, to place a pointer over a part of the current display and click. The input-response module responds to the position of the pointer and the particular display currently
10 displayed to generate a responsive display or take a particular action. In another preferred embodiment the user interface responds to function buttons on a remote control. Specific examples will be described below.

15 DETAILED DESCRIPTION OF THE EPG SYSTEM

Board Description

Fig. 3 is a block diagram an embodiment of the electronic hardware unit 52 utilized to perform the electronic
20 on-screen schedule display and other functions. The particular hardware unit 52 depicted is for TVRO (TV Receive Only) customers having home satellite dishes for television viewing. This unit is coupled in series with existing customer TVRO equipment.

25 In Fig. 3, the unit receives Baseband Video in 123 from the customer TVRO system. The unit optionally outputs Baseband Video out 128 or channel 3/4 RF out 130. The unit includes an 8-bit microprocessor 100, 64 bytes of code ROM 101, 512 K of RAM 102 for program data storage, a custom gate
30 array 103, segmented base registers 104 for fast memory data manipulation, security logic 106 for decoding incoming encrypted data, a serial bus 108 for display controller interface, serial bus 110 for inter-processor communication, watchdog timer 112 for error recovery, IR input 113, IR
35 transmitter circuits 116 for TV, VCR control, IR output 117, CRC-32 encoding and decoding logic 118, on-board power supply 120, video input 123, On-Screen Display Controller and

Formatter 124, custom color converter 126, RF modulator 127, choice of Baseband Video or RF outputs 128 or 130.

The on-screen display controller and formatter (OSDCF) 124 functions as an I/O controller, an on-screen display controller (OSD), and also as a closed-caption data (CCD) VBI data slicer. The VBI (vertical blanking interval) is a dead space in a TV signal that allows a television signal to reposition the scanning electron beam from the bottom to the top of the screen. Digital data, for example close-captioned data, is modulated onto the carrier signal during the VBI.

The OSDCF 124 includes an analog-to-digital convertor (ADC) which digitizes the incoming baseband video and extracts digital information transmitted in the VBIs. As explained more fully below, messages for transmission to the database are transmitted in the VBIs. These messages are transferred to the processor 100 which executes a data base engine process to build or update the database.

The OSD part of the OSDCF 124 includes cache memory, character memory, timing functions, and an external RAM. The OSD reads high level graphic commands sent from the processor 100 and stores graphic information in the RAM. The OSD outputs red (R), green (G), blue (B), graphic data which is used to generate a local video signal. Depending on the state of the user input interface, described below, the OSD local video output or the incoming live video will be displayed.

Accordingly, screen display graphic data generated by the database engine is transferred to the RAM of the OSD which the generates a local video signal that causes the display screen to be displayed on the television screen.

Scheduling Data Structures

The DBE builds a hierarchical database in the RAM. The hierarchical structure of the database is depicted in Fig. 4. The database is structured internally as schedule data structures and theme data structures linked by handles and handle tables. Each handle is an index to a handle table

which contains pointers to blocks of memory where structures of the database are stored.

The hierarchy for the schedule data structures, in descending order, is:

5

Channel Data Table: contains subscriber unit's list of channels;

10

Show List: contains time slots for each show scheduled to be broadcast for a channel;

Show Title: contains the title text and show title attributes;

Show Description: contains show's ratings, attributes, and description text.

15

A channel data table, depicted in Fig. 5A, is the highest data structure in the hierarchy. This table includes an entry for each channel received by the subscriber unit. The entries in the channel data table are changed infrequently and are determined by the location of the subscriber unit and type of services received. Each channel data table entry includes information concerning the channel and a handle to a show list handle table for the channel.

20

The next data structure in the hierarchy is the show list depicted in Fig. 5B. The show list includes a start time typically being midnight GMT and 24 hours of scheduling. The channel's schedule is given by an ordered sequence of show slots, with a show slot for each show to be broadcast by a particular channel for a particular day. Each slot includes a duration, show title handle, and show description handle. Finding an entry corresponding to a given start time requires the entries to be scanned, in order, from the beginning of show list and adding duration values.

25

30

The database, when fully constructed, holds a week's worth of show lists for each channel. The days of the week are accessed by incrementing the show list handle by two bytes. The show lists are updated each day at midnight GMT, with the show list for the day just completed being deleted

35

and the show list for same day next week being added to the database.

The next data structures in the schedule hierarchy are the show title entries, depicted in Fig. 5C, and show description entries, depicted in Fig. 5D. For a given show slot the show title entry and show description entry are accessed utilizing the handles included in the slot. The show title and show description entries are stored in a memory pool divided into blocks. Each show title is identified by a unique 20-bit show identification number (SID) and each show description is identified by a unique 20-bit number assigned at the head end. The show title handles are based on the SID and the show title handles are offsets into a show title handle table. The entry in the show title table accessed by a particular show title handle includes the address of the first block in the memory pool where the show title entry is stored. Similarly, the show description handle table entry accessed by a show description handle stores the address of the first block in the memory pool where the show description entry is stored.

Each show title entry includes a theme index ID and the text of the show title. Typically, a single show title entry will be referenced by many show lists for different channels, days, and times. Thus, by utilizing handles in the show lists all show lists reference a single show title entry in memory so that memory is efficiently used. Many show title entries have a long life because the show titles may be for series that are broadcast over long periods of time and may be referenced by many showlists since many shows are broadcast by multiple channels.

Each show description entry includes a theme index ID, critic's rating, MPAA rating for the show, traits mask bits, year produced, and show description text. Show description entries tend to have a shorter life than show title entries because a description is only valid for a particular episode of a series.

Schedule Search

To obtain schedule information for a particular time and to display the schedule information in the programming grid requires the following steps. For each channel in the channel list, the show list for the day is accessed and scanned. Horizontal blocks for the channel are sized according to the duration of the show slots including and following the selected time. The show title entry referenced by each show slot is accessed and the show title is displayed in the horizontal block corresponding to the show slot.

Ad Data Structures

An ad list data structure is similar to the show list. It includes a start time and 24 hours of ad scheduling. The ad list is regionalized and includes an ad slot for each ad to be broadcast for a given day. The ad slot includes a duration and an Ad ID utilized to access an ad entry.

Each add entry includes an ad banner text field, an ad text field, and a pointer to an ad logo, if appropriate. The ad logo includes a graphics file to be displayed with the ad.

The ad entries include the ad banner text and ad text.

Building the Database

The data base is built by a data base engine software module operating on the processor. Messages comprising discrete commands are received by the database engine. Examples of commands include a Region Command which specifies channels available for a particular subscriber unit to be included in the Channel Data Table; a Channel Data command including information utilized to form the entries in the Channel Data Table; and Showlist, Show Title, and Show Description commands including SIDs and DIDs referencing areas in memory. The database engine selects only Showlist Commands relevant to channels included in the Channel Table for further processing.

The data base engine creates storage locations in memory for all SIDs and DIDs included in any Showlist.

Information included in commands having matching SIDs or DIDs is written to the referenced memory area. In practice the SIDs and DIDs are processed by a hashing system for more efficient searching.

5 The messages may be transmitted to a subscriber unit in various ways. A system for receiving messages in the VBIs of broadcast programming has been described above. In a DBS system the messages may be transmitted in a dedicated bit stream.

10 In a DBS system video baseband signals are digitized, compressed, and modulated onto analog carrier signals. Because of advances in the art of compression, a carrier once used to transmit a single program can now transmit four programs. Typically, in addition to video
15 signals other bitstreams encoding information such as audio, VBI (vertical blanking information data such as closed caption and teletext), program guide information, and conditional access information, are provided as separate bitstreams, multiplexed into a composite bit stream, and modulated onto a
20 carrier signal.

 Alternatively, the database itself may be transmitted in a digital data stream. For example, in DSS the program guide information is transmitted in blocks of 3 hours of programming for 36 channels. Programming is digitally
25 modulated onto different bands. As depicted in Fig. 6, a satellite has several transponders 500 simultaneously transmitting on different bands. Several channels can be modulated onto a single band utilizing digital compression techniques. A bit stream including the current programming is
30 carried by all bands. However, future programming for different blocks of channels is transmitted on different bands. The blocks are transmitted as a carousel or endless loop so that there may be a delay before a particular time band is received.

35 A decoder at the viewer's location receives 16 carriers and controls a tuner/demodulator to select one carrier. The carrier is sampled, decoded, error-corrected, and demultiplexed to separate the various bit streams. The

decoder includes video decoder chips which decompress compressed video to reconstruct pictures of virtually any size.

When the viewer accesses the guide the block for that time period is loaded into memory so that the user can interact with the guide. For a future time and different channel there may be a time delay. For example, if the current programming block were B1 and the block currently received is B4 the user must wait for blocks B5, B6, and B7, to be transmitted before the current programming can be received and displayed. The viewer would wait for a time delay equal to the sum of time durations for transmitting each block, i.e., $d5+d6+d7$. If the program guide block is modulated onto a different band the cable box must tune to the band and wait until the desired block is transmitted on the carousel, so if the guide is accessed for future programming there could be a delay.

For cable the database is built at the SST head end and sent over land-lines to the cable head end. The cable company sends data any way it wants, e.g. VBIs, satellite, digital, etc.

User Interface

The user interface takes remote control commands as its primary input. In one embodiment a user requests various functions by pressing function buttons on a remote control. In another embodiment, the GUI is utilized with different interactive regions on a displayed screen corresponding to different functions. The user moves the cursor over the interactive region corresponding to a desired function and selects the function to generate a command. The particular form of entering a command is not critical and technology for utilizing voice commands may soon be available.

The user interface receives commands and responds with a requested display screen and by performing the function requested by the command. The function performed may be to perform an action such as recording a program, tuning to a channel, accessing a related internet site, purchasing a

pay-per-view program, or purchasing merchandise. The data and format of each screen is dependent on the previous screen, time of day, the contents of the data base, the command received, and other parameters. A state table is used to
5 define the screen flow.

For every defined screen, there is an entrance function, an exit function, an update function, and an array of request-handling functions. The entrance function is called when a state is first entered to collect all necessary
10 data and format the screen. The exit function is called to release memory and data for the screen. The update function is called once per minute to update the screen time and to re-draw the screen if any information displayed on the screen needs to be updated.

15 Once in a particular state, the table contains a reference to another software function corresponding to each key on the remote control or to each interactive region on the screen. These referenced functions will be executed whenever an associated remote control button is pressed or interactive
20 region is selected.

For example, if the user wishes to record a program, in the GUI embodiment, the viewer moves the cursor over the record interactive region which is then selected to request that the recording function be performed. A confirmation
25 screen will then be generated. Once the user confirms the recording request, an entry is made in a recording queue. A record daemon is then called from the real-time executive to examine the queue and manage recording functions.

The screens are displayed by the on-screen display
30 (OSD) controller based on graphic display commands issued by the database engine. Among the primitive commands needed to draw system display screens are the Erase Screen Command; Draw Rectangle Command; Save Rectangle Command; Restore Rectangle Command; Move Rectangle Commands; Write ASCII String Command;
35 and Draw Channel Icon Command.

Each screen includes areas that are constant and based on code and data stored in non-volatile memory and variable areas such as show titles and descriptions which

utilize data stored in the database. As described above in the description of the database engine, the database is structured to facilitate efficient searching for information, generally in the form of ASCII text strings, stored in the database. Additionally, graphics files are also being stored in the database to be displayed in windows of the display screen.

DETAILED DESCRIPTION OF THE PREVIEW UNIT.

Fig. 7 is a block diagram of one embodiment of the invention and Fig. 8 is flow chart depicting the steps to previewing a program. Referring to Figs. 7 and 8, an EPG system 700 performs the database engine and user interface functions as described above. An EPG video signal 702 is provided as a primary signal to be displayed on a first portion of a display screen by a picture-in-picture (PIP) controller 704.

A preview controller 706 is provided information identifying a particular program selected by the user. The preview controller 706 controls the decoder 36 to tune to the band carrying the preview bitstream, accesses the demultiplexed bit stream, processes the preview headers to identify a preview packet corresponding to the program identified by the viewer, and controls the decoder to provide an auxiliary video signal displaying the preview video corresponding to the selected program. Additionally, if the preview includes audio the preview controller causes the decoder to process audio bits in the preview packet and provide an audio signal to the television set.

Fig. 9 schematically depicts the digital information carried by one carrier of a DBS. As described, four channels can be compressed and carried on one carrier. Additionally, VBI information, program guide information, etc. may also be carried. The trailer video streams can also be carried. As described above, if the trailers are displayed in small window the video can be highly-compressed so that the trailer bit streams do not use much of the bandwidth of the carrier.

Fig. 10 depicts alternative ways of transmitting the trailers. One trailer bit stream can transmit a single trailer as a carousel 900. Thus, for a particular show the preview controller 706 selects the particular bit stream and the trailer will be displayed with no perceptible delay. Alternatively, a plurality of trailers can be transmitted as a single bit stream. Each trailer is included on a carousel 902. In this embodiment, less bandwidth is required but there may be a perceptible delay before a particular trailer is displayed.

The PIP controller 704 then displays the preview video on a second portion of the display screen. Alternatively, the preview can be displayed on the entire screen. The trailer video could not be as highly-compressed as when viewed in window and more bandwidth of the carrier would be required. The size of the window for displaying the trailer is determined depending on the specification for a particular system.

The invention has been described with reference to the preferred embodiments. Alternatives and substitutions will now be apparent to persons of skill in the art. For example, although the preferred embodiment utilizes a television system the invention is applicable to a PC-TV system. The preview bit stream either is processed by the PC-TV directly to display the preview video or an auxiliary video signal is processed to be displayed within a window.

WHAT IS CLAIMED IS:

1 1. A method of providing preview information to
2 assist in selecting video programming, said method comprising:
3 displaying schedule information on a display screen
4 including source and identification information about one or a
5 plurality of available shows;
6 receiving user input to select a particular show
7 from said plurality of shows;
8 receiving user input to initiate a preview
9 operation; and
10 displaying a preview including a video preview of
11 the particular show on the screen.

1 2. The method of claim 1 further comprising the
2 steps of:
3 receiving said video preview in compressed form; and
4 decompressing said video preview to displaying the
5 video preview.

1 3. The method of claim 1 wherein said step of
2 selecting comprises the steps of:
3 highlighting a particular show with a cursor or
4 pointer.

1 4. The method of claim 2 further comprising the
2 steps of:
3 receiving a preview bit stream in the form of an
4 endless loop of a plurality of preview packets, each preview
5 packet including header information and compressed video
6 information; and
7 utilizing said header information to identify a
8 particular preview packet in said endless loop that is
9 associated with the particular show selected.

1 5. The method of claim 2 further comprising the
2 steps of:
3 receiving a preview bit stream in the form of an
4 endless loop of a single preview packet repeated a plurality
5 of times, said preview packet including header information and
6 compressed video information; and
7 utilizing said header information to identify a
8 particular preview packet in said endless loop that is
9 associated with the particular show selected.

1 6. The method of claim 1, 2, 3, 4, or 5 further
2 comprising the step of:
3 displaying said preview in window that is smaller
4 than the display screen.

1 7. The method of claim 1, 2, 3, 4 or 5 further
2 comprising the step of:
3 displaying said preview on the entire display
4 screen.

1 8. A method of providing preview information to
2 assist in selecting video programming, said method comprising:
3 displaying schedule information on a display screen
4 including source and identification information about one or a
5 plurality of available shows;
6 receiving user input to select a particular show
7 from said plurality of shows and self-activate the initiation
8 of a preview operation; and
9 displaying a preview including a video preview of
10 the particular show on the screen.

1 9. The method of claim 8 further comprising the
2 steps of:
3 receiving said video preview in compressed form; and
4 decompressing said video preview to displaying the
5 video preview.

1 10. The method of claim 8 wherein said step of
2 selecting comprises the steps of:
3 highlighting a particular show with a cursor or
4 pointer.

1 11. The method of claim 9 further comprising the
2 steps of:
3 receiving a preview bit stream in the form of an
4 endless loop of a plurality of preview packets, each preview
5 packet including header information and compressed video
6 information; and
7 utilizing said header information to identify a
8 particular preview packet in said endless loop that is
9 associated with the particular show selected.

1 12. The method of claim 9 further comprising the
2 steps of:
3 receiving a preview bit stream in the form of an
4 endless loop of a single preview packet repeated a plurality
5 of times, said preview packet including header information and
6 compressed video information; and
7 utilizing said header information to identify a
8 particular preview packet in said endless loop that is
9 associated with the particular show selected.

1 13. The method of claim 8, 9, 10, 11, or 12 further
2 comprising the step of:
3 displaying said preview in window that is smaller
4 than the display screen.

1 14. The method of claim 8, 9, 10, 11, or 12 further
2 comprising the step of:
3 displaying said preview on the entire display
4 screen.

1 15. A system for previewing selected programs
2 comprising:

3 a television system for displaying video signals
4 provided as baseband video signal or RF signals;

5 a decoder for receiving digital signals, providing
6 selected bit streams encoded by the digital signals, and
7 converting a selected bit stream into a video signal, with one
8 of the bit streams being a preview bit stream including
9 preview packets in form of a header identifying the preview
10 and compressed preview video bits;


11 a preview controller, coupled to the decoder to
12 receive the preview bit stream, for inspecting said headers to
13 identify a selected preview packet and for controlling the
14 decoder to convert the preview video bits in the selected
15 packet to an auxiliary video signal;

16 a display controller, coupled to receive primary and
17 auxiliary video signals, for displaying the primary video
18 signal on a first portion of the display screen and the
19 auxiliary video signal on a second portion of the display
20 screen;


21 an EPG system for providing an EPG video signal for
22 displaying an electronic guide as a primary signal, for
23 providing a user interface that receives user input selecting
24 a particular program displayed in an EPG, for controlling the
25 preview controller to select a particular preview packet
26 corresponding the particular signal so that the auxiliary
27 signal will display a preview of the particular channel on the
28 second portion of the display screen.

1 16. The method of claim 15 wherein said digital
2 signal is a DBS signal.

1 / 10

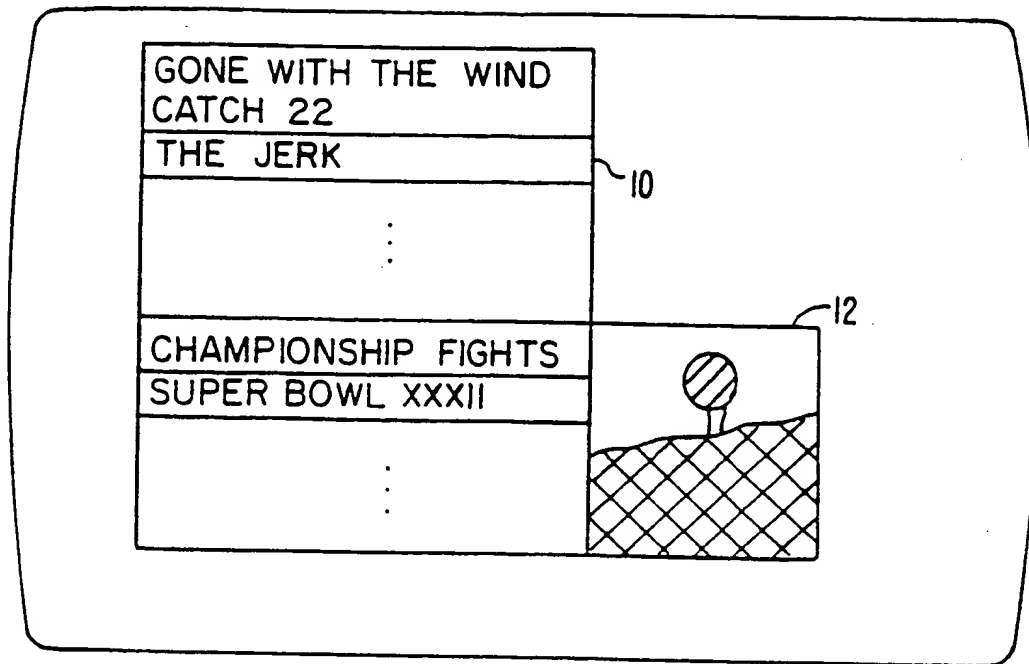*FIG. 1.*

2/10

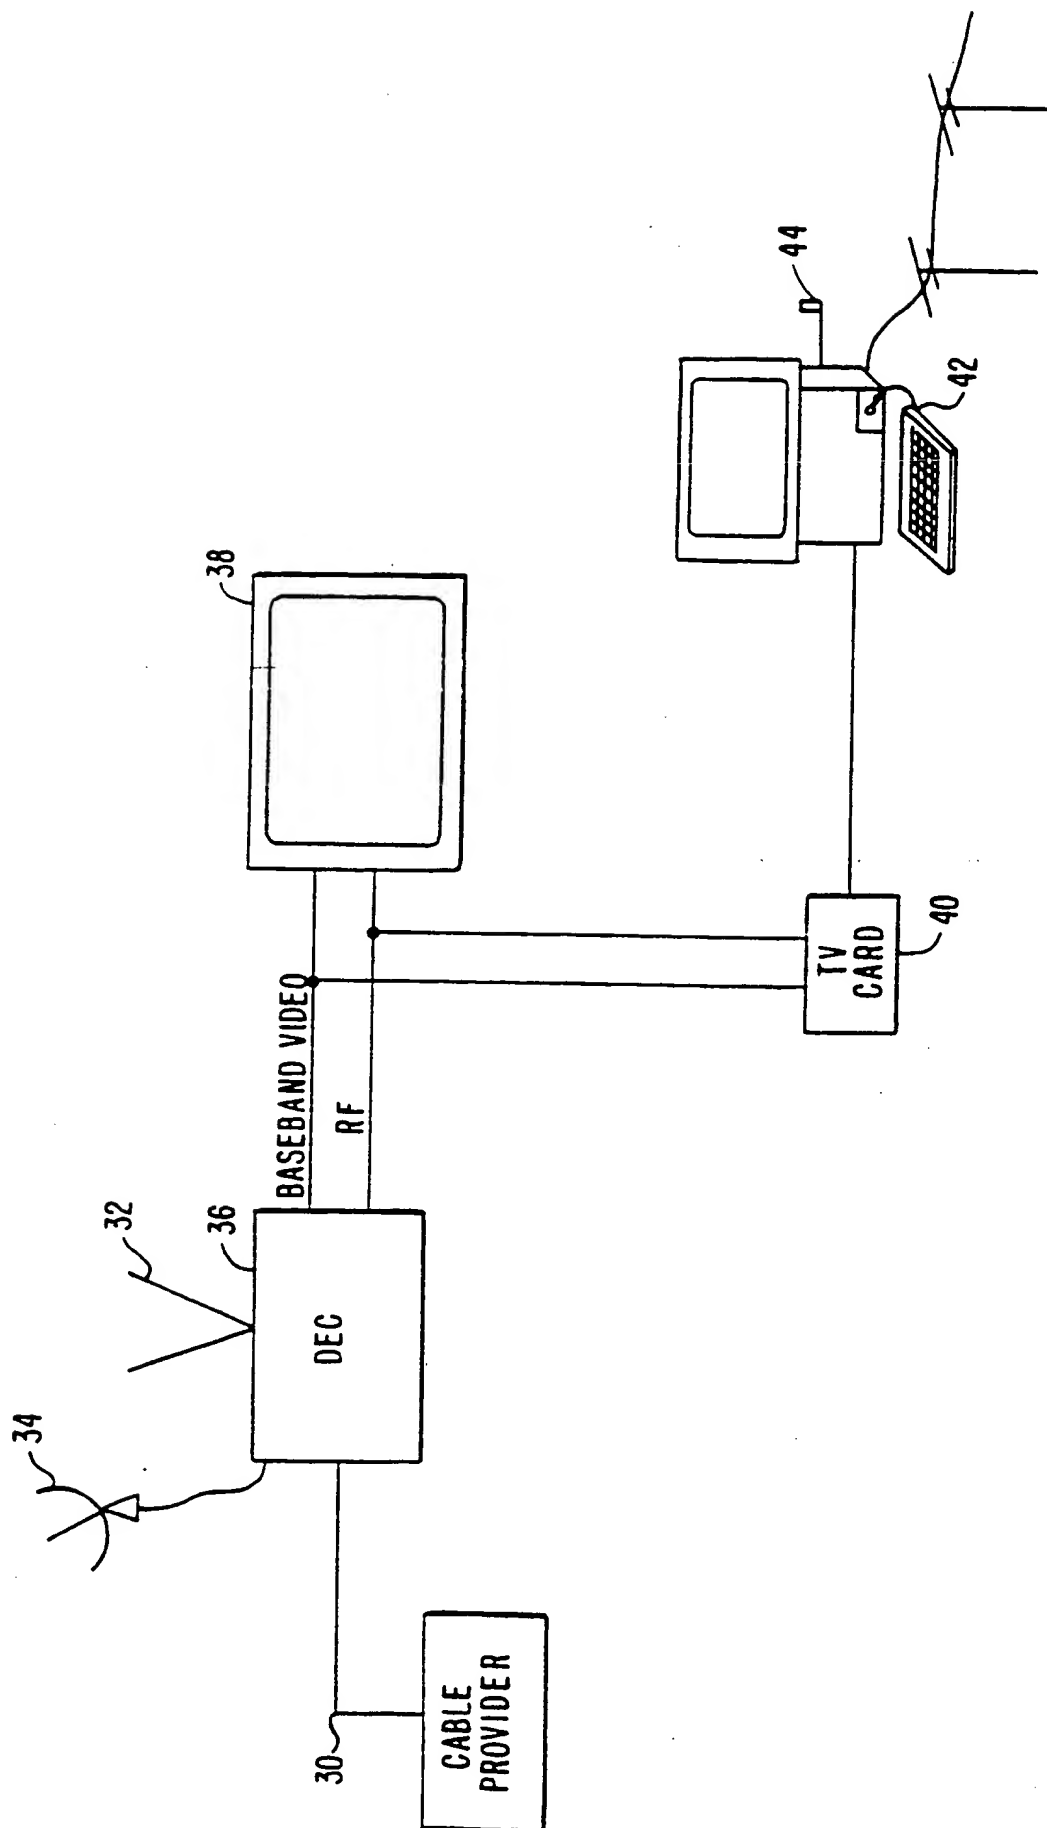**FIG. 2.**

3/10

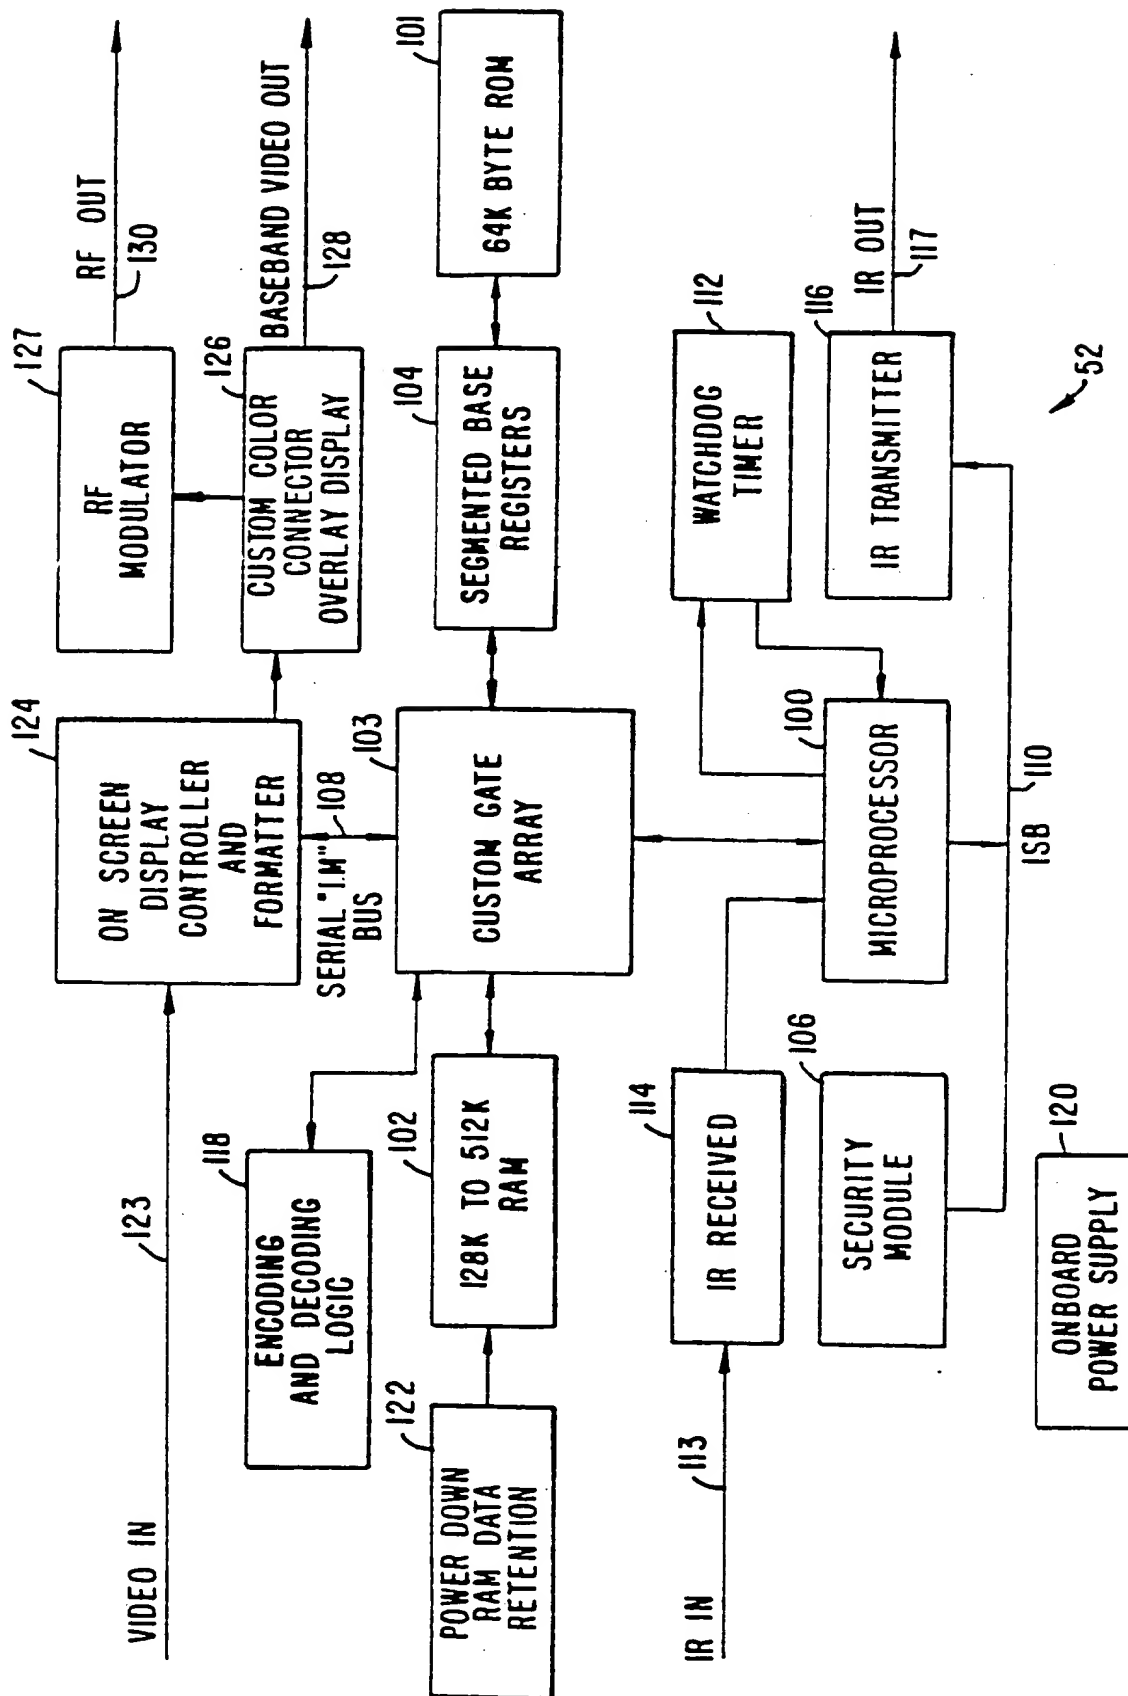


FIG. 3.

FIG. 4.

הנהגתו של השר לא תהיה כרוכה באחריות

5/10

CHANNEL DATA TABLE

	7	6	5	4	3	2	1	0			
0x00	TYPE = 0x01										
0x01	NBR BLOCKS										
0x02	0x00										
0x03	NBR CHANNELS										
0x04	MSB		CHANNEL ID						LSB		0x00
0x06	DPF	ICF	NDF				NF	TMSB	0x02		
0x07	TUNE CHANNEL NBR								0x03		
0x08	TRANSPONDER NBR								0x04		
0x09	SATELLITE NBR								0x05		
0x0A			SOURCE		CHANNEL TYPE		NMSB		0x06		
0x0B	NATIVE CHANNEL NBR								0x07		
0x0C	NAME MASK BITS								0x08		
0x0D	FAVORITES LINK								0x09		
0x0E	MSB		SHOWLIST HANDLE TABLE						LSB		0x0A
0x10	MSB								LSB		0x0C

FIG. 5A.

6/10

SHOW LIST

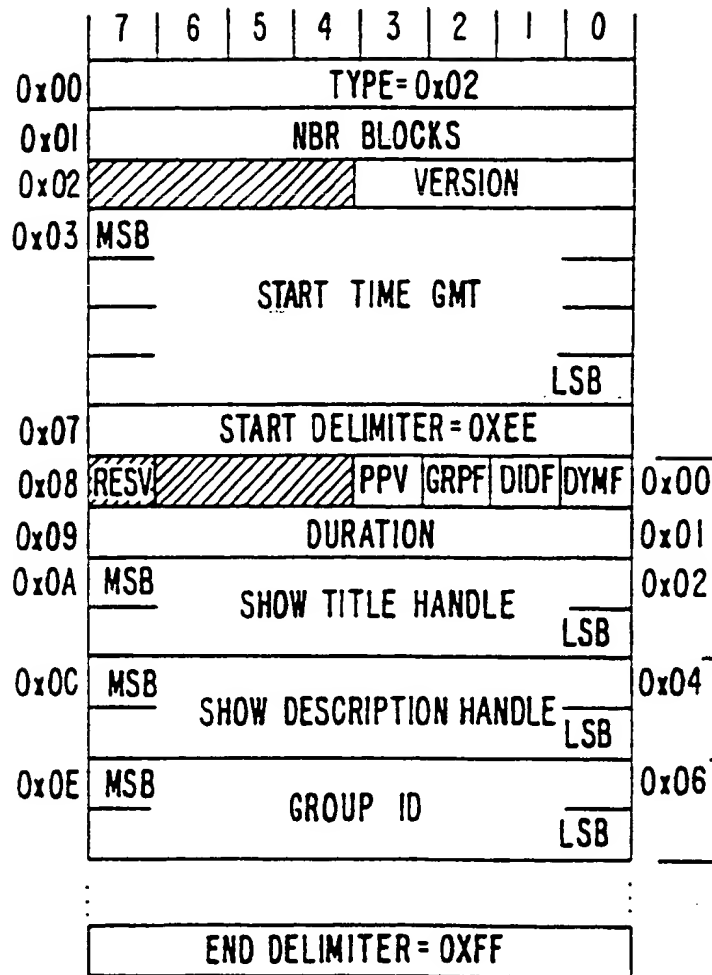


FIG. 5B.

7/10

SHOW TITLE ENTRY

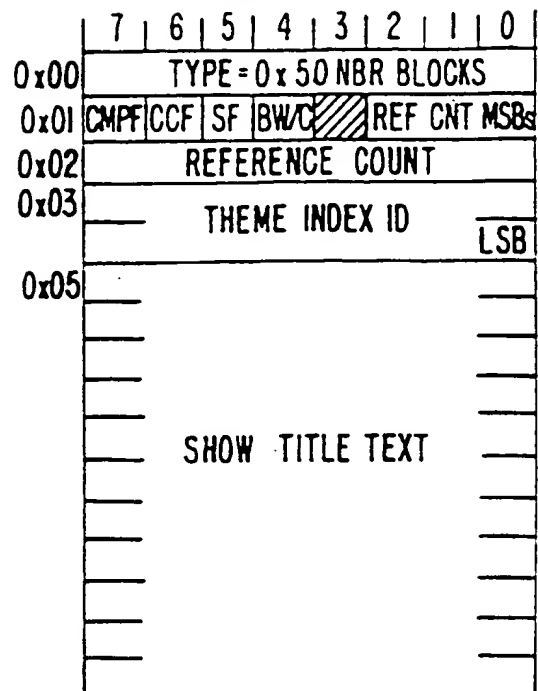


FIG. 5C.

SHOW DESCRIPTION ENTRY

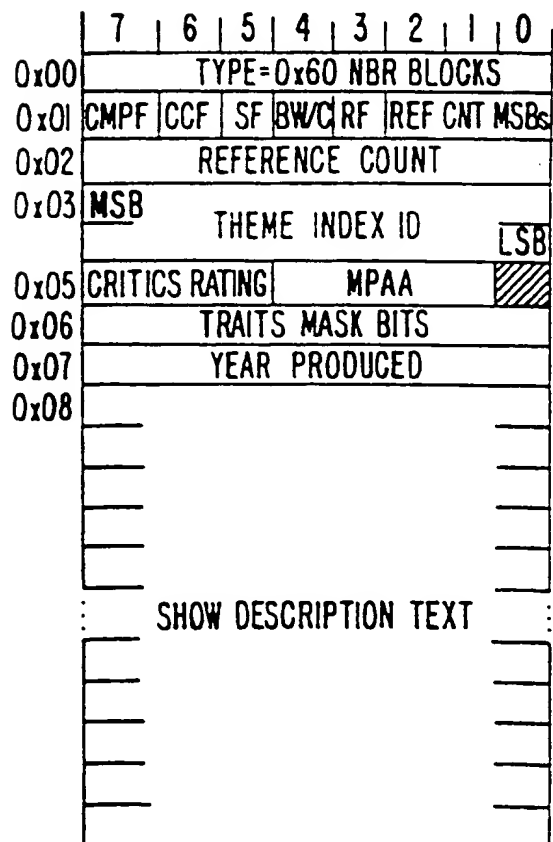
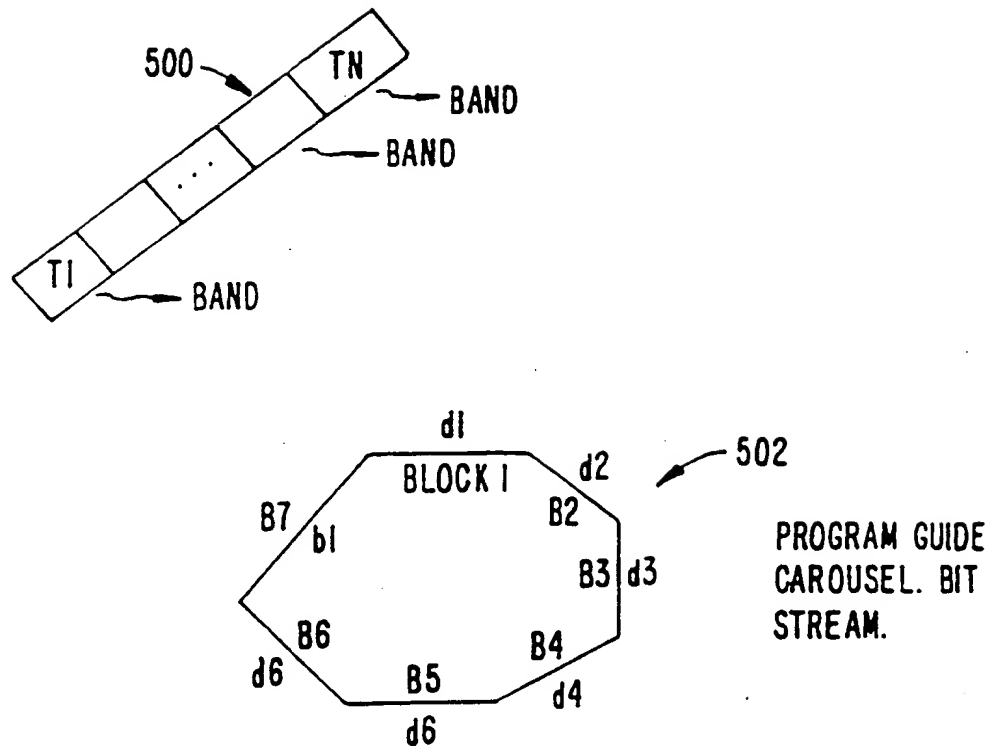


FIG. 5D.

8/10

**FIG. 6.**

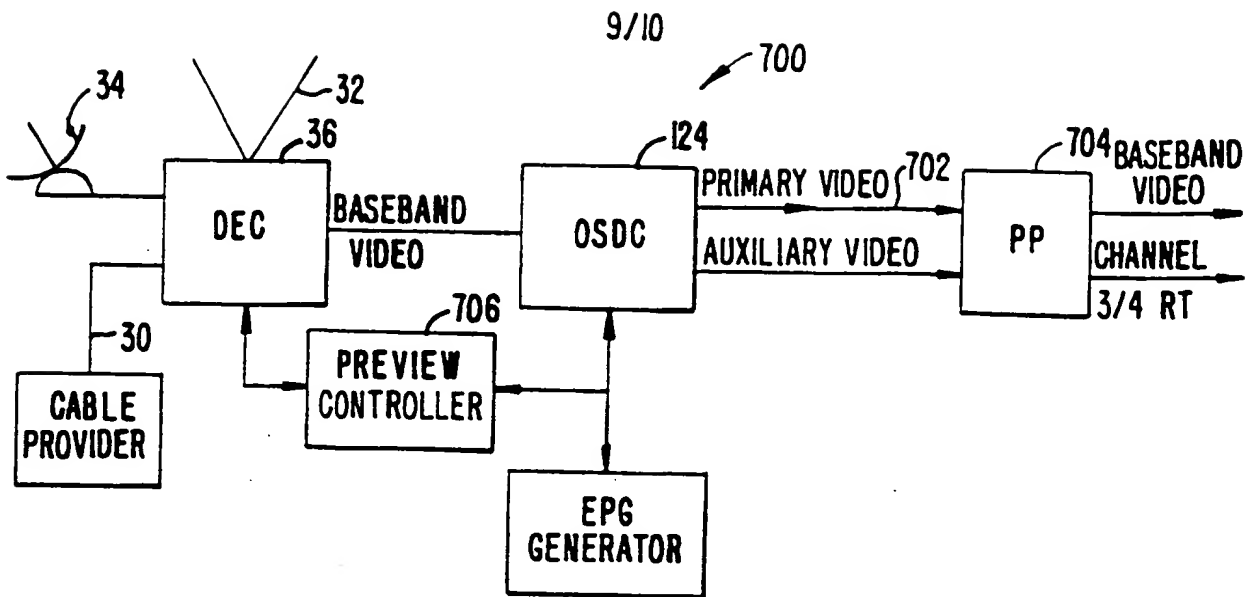


FIG. 7.

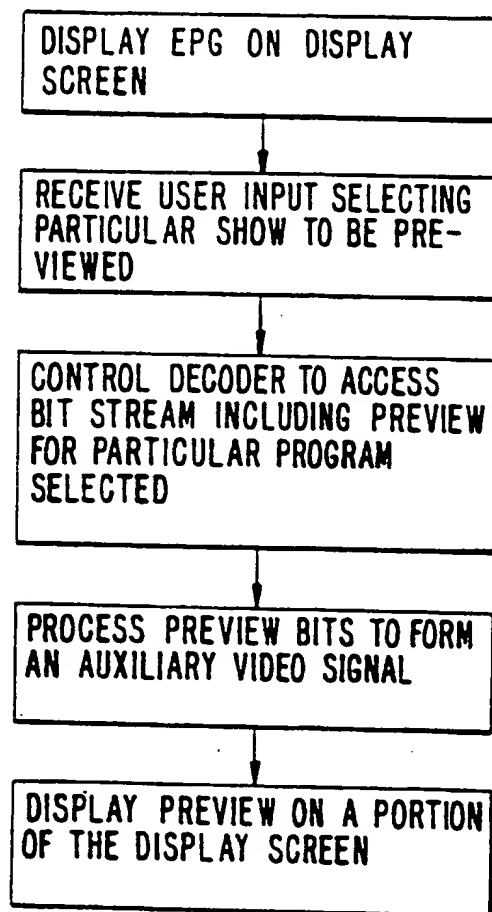

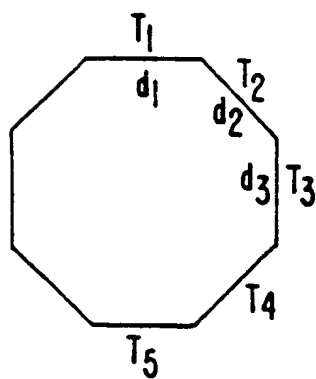
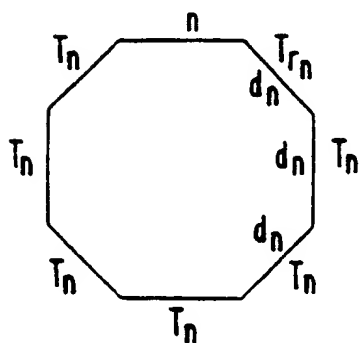


FIG. 8

10/10

**FIG. 9.****FIG. 10.**

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :

H04N 7/00

A3

(11) International Publication Number:

WO 98/39893

(43) International Publication Date: 11 September 1998 (11.09.98)

(21) International Application Number: PCT/US98/03893

(22) International Filing Date: 2 March 1998 (02.03.98)

(30) Priority Data:

08/810,566

3 March 1997 (03.03.97)

US

(71) Applicant: STARSIGHT TELECAST, INC. [US/US]; 3rd floor, 39650 Liberty Street, Fremont, CA 94538 (US).

(72) Inventor: KLOSTERMAN, Brian, L.; 310 Rio Grande Place, San Ramon, CA 94538 (US).

(74) Agents: JOHNSTON, R., W. et al.; Christie, Parker & Hale, LLP, P.O. Box 7068,, Pasadena, CA 91109-7068 (US).


(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published*With international search report.*

(88) Date of publication of the international search report:

3 December 1998 (03.12.98)

(54) Title: ELECTRONIC PROGRAMMING GUIDE WITH MOVIE PREVIEW

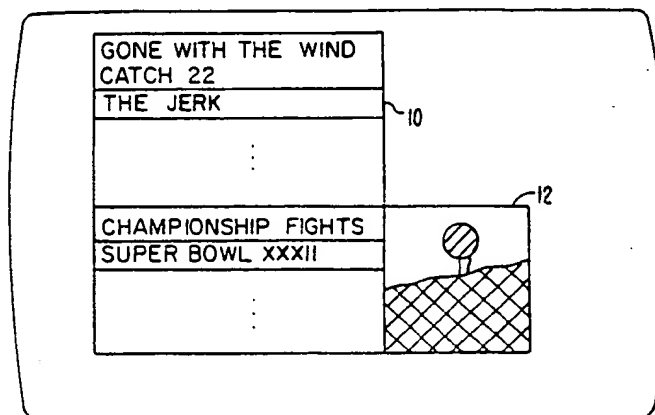**(57) Abstract**

A preview system activated from an on-screen programming guide displays a video preview of a selected particular program on the display screen. The video preview is displayed on less than the full screen so that the video can be highly-compressed to save bandwidth.


FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/03893

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) : H04N 7/00 US CL : 348/563, 564, 565, 569, 906; 455/2, 6.2, 6.3, 6.1, 5.1, 4.2 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 348/563, 564, 565, 569, 906; 455/2, 6.2, 6.3, 6.1, 5.1, 4.2 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) GPIC		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,710,601 A (MARSHALL et al) 20 January 1998, col. 2, lines 20-22, 44-65 and Figures 7, 8.	1, 8
----		-----
Y		2-3, 9-10
Y	US 5,604,544 A (BERTRAM) 18 February 1997, Figures 17, 18, col. 4, lines 8-16, col. 5, lines 55-64, col. 9, lines 16-59.	2-3, 9-10
X	US 5,594,509 A (FLORIN et al) 14 January 1997, Figures 12, 38, abstract, col. 8, line 50 through col. 9, line 25, col. 21, lines 33-47.	1, 8, 15
A	US 5,619,249 A (BILLOCK et al) 08 April 1997	
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "A" document member of the same patent family	
Date of the actual completion of the international search 15 JUNE 1998		Date of mailing of the international search report 15 SEP 1998
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer ANDREW FAILE  Telephone No. (703) 305-4380

This Page Blank (uspto)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)